Cisco Performance Routing (PfR) Solution Guides

PfR Internet Presence - Implementing Cost based Policies

Navigation

- Go to PfR home page
- Go to PfR Solution Guides home page

Contents

- 1 Introduction
- 2 Link Policies
 - ♦ 2.1 Overview
 - ◆ 2.2 Link Utilization Policy
 - ♦ 2.3 Range Policy
 - ♦ 2.4 Cost Policy
- <u>3 Cost Policy Billing Models</u>
 - ◆ 3.1 Link Utilization Rollup Calculations
 - ◆ 3.2 Monthly Sustained Utilization Calculation
- 4 PfR Network Topology Used
- <u>5 Checking Statistics and Flows</u>
 - ◆ <u>5.1 Configuring Flexible</u> Netflow
 - ♦ 5.2 Checking flows on R2
- 6 Display Routing Table (Central Site)
- 7 PfR Configuration
- <u>8 Verifying PfR Cost Minimization</u> <u>Policies</u>
- 9 Verifying Enforcement
- 10 Conclusion

Contents 1

Introduction

This solution guide describes how to configure and apply Cisco IOS Performance Routing (PfR) cost policies. A PfR policy can be configured to optimize traffic based on the monetary cost of the exit links. The PfR Cost Based Optimization feature provides financial benefits by directing traffic to lower cost links, while at the same time honoring other configured policies such as delay, loss, and utilization.

There are two main methods of billing:

• **Fixed-rate billing** is used when the ISP bills one flat rate for a link regardless of bandwidth usage. If fixed-rate billing only is configured on the exit links, all exits are considered equal with regard to cost-optimization and other policy parameters (such as delay, loss, and utilization) are used to determine if the prefix or exit link is in-policy.

Configured under external interfaces using: cost-minimization {fixed fee cost}

• Tier-based billing is used when the ISP bills at a tiered rate based on the percentage of exit link utilization. Each cost tier is configured separately with an associated monetary cost and a percentage of bandwidth utilization that activates the tier is defined. The lowest cost tier for an exit using tier-based billing is charged each month regardless of the bandwidth actually utilized. An allowance is made for bursting in the algorithm used to determine the tier-based billing. In this situation, bursting is defined as short periods of high bandwidth usage that would be expensive under fixed-rate billing.

Configured under external interfaces using: cost-minimization {tier percentage fee fee}

Cost Based Optimization can be applied to links that are billed using a fixed or tiered billing method. Load balancing based on cost can also be achieved.

Link Policies

Overview

PfR link policies are a set of rules that are applied against PfR-managed external links (an external link is an interface on a border router on the network edge). Link policies define the desired performance characteristics of the links. Instead of defining the performance of an individual traffic class entry that uses the link (as in traffic class performance policies), link policies are concerned with the performance of the link as a whole. Link policies are applied both to exit (egress) links and entrance (ingress) links. The following link policy types describe the different performance characteristics that can be managed using link policies.

Link Utilization Policy

A traffic load (also referred to as utilization) policy consists of an upper threshold on the amount of traffic that a specific link can carry. Cisco IOS PfR supports per traffic class load distribution. Every 20 seconds, by default, the border router reports the link utilization to the master controller, after an external interface is configured for a border router. Both exit link traffic and entrance link traffic load thresholds can be

Link Policies 2

configured as a PfR policy. If the exit or entrance link utilization is above the configured threshold, or the default threshold of 75-percent, the exit or entrance link is in an out-of-policy (OOP) state and PfR starts the monitoring process to find an alternative link for the traffic class. The link utilization threshold can be manually configured either as an absolute value in kilobytes per second (kbps) or as a percentage. A load utilization policy for an individual interface is configured on the master controller under the border router configuration.

When configuring load distribution, we recommend that you set the interface load calculation on external interfaces to 30-second intervals with the load-interval interface configuration command. The default calculation interval is 300 seconds. The load calculation is configured under interface configuration mode on the border routers.

Range Policy

A range policy is defined to maintain all links within a certain utilization range, relative to each other in order to ensure that the traffic load is distributed. For example, if a network has multiple exit links, and there is no financial reason to choose one link over another, the optimal choice is to provide an even load distribution across all links. The load-sharing provided by traditional routing protocols is not always evenly distributed, because the load-sharing is flow-based rather than performance- or policy-based. Cisco PfR range functionality allows you to configure PfR to maintain the traffic utilization on a set of links within a certain percentage range of each other. If the difference between the links becomes too great, PfR will attempt to bring the link back to an in-policy state by distributing traffic classes among the available links. The master controller sets the maximum range utilization to 20 percent for all PfR-managed links by default, but the utilization range can be configured using a maximum percentage value.

Both exit link and entrance link utilization ranges can be configured as a PfR policy.

Cost Policy

PfR support for cost-based optimization was introduced in Cisco IOS Release 12.3(14)T, 12.2(33)SRB, and later releases. Cost-based optimization allows you to configure policies based on the monetary cost of each exit link in your network. To implement PfR cost-based optimization the PfR master controller is configured to send traffic over exit links that provide the most cost-effective bandwidth utilization, while still maintaining the desired performance characteristics. The load balancing algorithm is modified to allow for more efficient bandwidth utilization while minimizing the link cost.

Cost Policy Billing Models

Link Utilization Rollup Calculations

The first step in determining the billing fee for each exit link per month is to calculate the link utilization rollup values.

Link utilization rollup values are the averages of the link utilization readings taken at regular intervals (sampling period) from the ingress and egress interfaces at the border routers for a given rollup period. For

example, if a sampling period was set to 60 minutes, and the rollup was set at 1440 minutes (24 hours), we would have 24 ingress and 24 egress link utilization samples used for calculating the link utilization rollup. An average is taken for each set of ingress and egress samples from that rollup period to get a link utilization rollup value for the ingress and egress links.

Monthly Sustained Utilization Calculation

After the link utilization rollup calculation is performed, the monthly sustained utilization is calculated. The specific details of tier-based billing models vary by ISP. However, most ISPs use some variation of the following algorithm to calculate what an enterprise should pay in a tiered billing plan:

- Gather periodic measurements of egress and ingress traffic carried on the enterprise connection to the ISP network and aggregate the measurements to generate a rollup value for a rollup period.
- Calculate one or more rollup values per billing period.
- Rank the rollup values for the billing period into a stack from the largest value to the smallest.
- Discard the top X percent (5% percent is the default) to accommodate bursting (Any bandwidth above the sustained monthly utilization.
- Apply the highest remaining rollup value in the stack, referred to as the sustained Monthly Target Link Utilization (MTLU), to a tiered structure to determine a tier associated with the rollup value.
- Charge the customer based on a set cost associated with the identified tier.

The monthly sustained utilization rollup calculations can be configured to use one of the following three techniques:

• Combined: the monthly sustained utilization calculation is based on a combination of the egress and ingress rollup samples on a single sorted stack, the highest X rollup values are discarded, and the next highest rollup value is the MTLU.

Configured under the external interface: cost-minimization calc combined

• **Separate**: the egress and ingress rollup samples for a link are sorted into separate stacks and the highest X rollup values for each stack are discarded. The highest remaining rollup value of the two stacks is selected as the MTLU.

Configured under the external interfaces: cost-minimization calc separate

• **Summed**: the egress and ingress rollup samples are added together. The summed values of each rollup sample are placed into one stack, the top X rollup values are discarded, leaving the next highest rollup value as the MTLU.

Configured under the external interfaces: cost-minimization calc sum

Example:

In the following example, we use the separate technique, which means we have all samples sorted in two different columns. We also define an absolute value of 5 highest value to discard. Therefore, PfR will remove


the highest 5 rollup values in each column. After the discarded values, the next highest value is 52 and this becomes the *Sustained Monthly Utilization*.

Egress Rollup	Ingress Rollup	Rollups are Sorted from Highest Bandwidth to Lowest Bandwidth in Billing Period
96	40	
85	35	
70	34	
65	32	
60	30	
52	26	This value becomes the highest value after discarded the 5 highest rollup.
50	25	
48	23	
40	22	
35	20	
34	19	

PfR Network Topology Used

The central site has three Border Routers, connected to three separate Service Providers using eBGP. R2, R4, R5 and R6 are iBGP peers. For an Internet Presence solution, it may be recommended to have a dedicated Master Controller given the possible high number of prefixes that have to be optimized and managed.

- R2, R4, R5 and R6 are iBGP peers in AS 100
- R3 is the Master Controller
- R4, R5 and R6 are the Border Routers
- Traffic Simulator tool is used between R1 and R11, R12 to emulates traffic
- R1, R11 and R12 are traffic generators (to send/receive http, ssh, etc.).

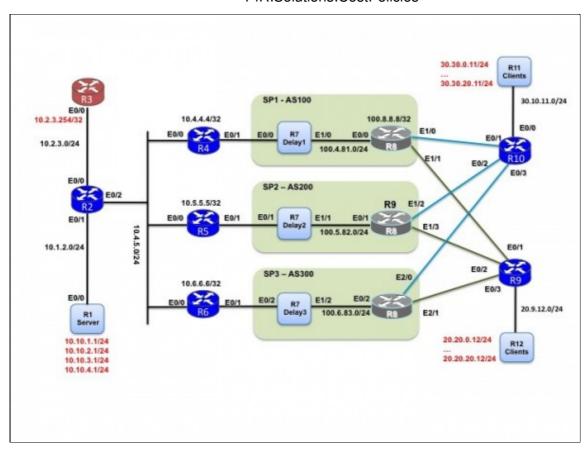

Checking Statistics and Flows

Explicitly enabling Netflow is not required for PfR to run but here we enable Flexible NetFlow to check active flows crossing the Border Routers, verify the ingress/egress interfaces used (must be internal to external or vice-versa).

Configuring Flexible Netflow

The following configuration is just an example of a flow monitor definition in order to monitor active flows based on the 5-tuples + source interface and collect IP Source and Destination Address, ports and DSCP values.

Flow Record Definition

```
!
flow record MYRECORD
match ipv4 protocol
match ipv4 source address
match ipv4 destination address
match transport source-port
match transport destination-port
match interface input
collect ipv4 dscp
```

```
collect interface output
collect counter bytes
collect counter packets
```

Flow Monitor Definition

```
flow monitor MYMONITOR
  record MYRECORD
```

And then apply the Flexible NetFlow Monitor on the Border Routers as well as R2:

```
interface Ethernet0/0
  ip flow monitor MYMONITOR input
'
```

Checking flows on R2

Here is the output on R2 which sees all flows:

```
R2#sh flow monitor MYMONITOR cache format table
 R2#shflow
                                                Normal
  Cache type:
  Cache size:
                                                   4096
  Current entries:
                                                    208
  High Watermark:
                                                    208
  Flows added:
                                                    208
 Flows aged:
                                                     0
    - Active timeout ( 1800 secs)
- Inactive timeout ( 15 secs)
                                                     0
                                                     0
                                                      0
    - Event aged
    - Watermark aged
                                                      0
    - Emergency aged
```

IPV4 SRC ADDR	IPV4 DST ADDR	TRNS SRC PORT	TRNS DST PORT	INTF INPUT	IP PROT	int
=======================================		=========	=========		======	===
10.10.3.1	30.30.16.11	80	2037	Et0/1	6	Et0
10.10.1.1	30.30.20.11	7000	7001	Et0/1	6	Et0
10.10.1.1	30.30.8.11	7000	7005	Et0/1	6	Et0
10.10.2.1	30.30.9.11	25	1028	Et0/1	6	Et0
10.10.1.1	30.30.17.11	7000	7004	Et0/1	6	Et0
10.10.2.1	20.20.8.12	25	1016	Et0/1	6	Et0
10.10.3.1	30.30.18.11	80	2038	Et0/1	6	Et0
10.10.4.1	20.20.20.12	80	2045	Et0/1	6	Et0
10.10.1.1	20.20.12.12	7000	7005	Et0/1	6	Et0
10.10.4.1	20.20.6.12	80	2001	Et0/1	6	Et0
10.10.1.1	30.30.5.11	7000	7008	Et0/1	6	Et0
10.10.2.1	20.20.5.12	25	1029	Et0/1	6	Et0
10.10.1.1	30.30.11.11	7000	7006	Et0/1	6	Et0
10.10.2.1	30.30.4.11	25	1027	Et0/1	6	Et0
10.10.1.1	20.20.4.12	7000	7003	Et0/1	6	Et0
10.10.1.1	20.20.15.12	7000	7009	Et0/1	6	Et0
10.10.4.1	20.20.19.12	80	2048	Et0/1	6	Et0

[SNIP]

Display Routing Table (Central Site)

Let's have a look at the routing table before applying a PfR configuration. Central site has prefixes 10.10.0.0/16 in Autonomous System 100, remote sites have prefixes 20.20.0.0/16 in Autonomous System 200 and 30.30.0.0/16 in Autonomous System 300. For clarity, only interesting part matching the destination prefixes of the routing tables are displayed. The servers subnets (inside prefixes) are 10.10.1.0/24, 10.10.3.0/24 and 10.10.4.0/24. (Remember that these prefixes must be in the BGP table in case of inbound optimization).

Note: there is a BGP policy in place to enforce the path through R6. This is to demonstrate that even if there is a BGP local preference policy in place, PfR is able to override this when needed.

- A Local Preference of 50 is assigned on R4 for 20.20.0.0/16 and 30.30.0.0/16 routes
- A Local Preference of 100 is assigned on R5 for 20.20.0.0/16 and 30.30.0.0/16 routes
- A Local Preference of 200 is assigned on R6 for 20.20.0.0/16 and 30.30.0.0/16 routes

On the Border Router R4:

```
R4#sh bgp
BGP table version is 1476, local router ID is 10.4.4.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
            r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
            x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
    Network
                   Next Hop
                                     Metric LocPrf Weight Path
* i 10.10.1.0/24
                  10.4.5.2
                                         21 100 0 i <-- INSIDE
* i
                   10.4.5.2
                                         21
                                              100
                                                      0 i
                   10.4.5.2
                                         21
                                               32768 i
                                         21 100 0 i <-- INSIDE
 * i 10.10.2.0/24 10.4.5.2
* i
                   10.4.5.2
                                         21 100
                                                      0 i
*>
                   10.4.5.2
                                         21
                                                32768 i
                                         21 100 0 i <-- INSIDE
 * i 10.10.3.0/24 10.4.5.2
                                         21
                   10.4.5.2
                                              100
                                                       0 i
                                         21
                                                   32768 i
 *>
                   10.4.5.2
                                         21
                                              100 0 i <-- INSIDE
 * i 10.10.4.0/24
                   10.4.5.2
                                         21
                   10.4.5.2
                                               100
                                                       0 i
                                                   32768 i
                   10.4.5.2
                                         21
 *>i 20.20.0.0/16
                                                    0 300 20 i <-- REMOTE AS200
                   100.6.83.1
                                              200
                   100.4.81.1
                                               50
                                                       0 100 20 i
*>i 30.30.0.0/16
                                         0
                   100.6.83.1
                                               200
                                                       0 300 30 i <-- REMOTE AS300
                   100.4.81.1
                                               50
                                                       0 100 30 i
[SNIP]
R4#
```

On the Border Router R5:

BGP table version is 1442, local router ID is 10.5.5.5 Status codes: s suppressed, d damped, h history, * valid, > best, i - internal, r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter, x best-external, a additional-path, c RIB-compressed, Origin codes: i - IGP, e - EGP, ? - incomplete RPKI validation codes: V valid, I invalid, N Not found Metric LocPrf Weight Path Network Next Hop * i 10.10.1.0/24 10.4.5.2 21 100 0 i <-- INSIDE * i 10.4.5.2 100 21 0 i 10.4.5.2 21 32768 i * i 10.10.2.0/24 10.4.5.2 21 100 0 i <-- INSIDE * i 10.4.5.2 21 100 0 i 10.4.5.2 21 32768 i 0 i <-- INSIDE * i 10.10.3.0/24 10.4.5.2 21 100 * i 0 i 10.4.5.2 21 100 10.4.5.2 32768 i 21 0 i <-- INSIDE * i 10.10.4.0/24 10.4.5.2 21 100 10.4.5.2 * i 21 100 0 i *> 10.4.5.2 21 32768 i *>i 20.20.0.0/16 100.6.83.1 0 200 0 300 20 i <-- REMOTE AS200 100.5.82.1 100 0 200 20 i 100.6.83.1 *>i 30.30.0.0/16 200 0 300 30 i <-- REMOTE AS300 100 100.5.82.1 0 200 30 i [SNIP] R5#

On the Border Router R6:

```
R6#sh bgp
BGP table version is 1436, local router ID is 10.6.6.6
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal, r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
                                              Metric LocPrf Weight Path
                        Next Hop
     Network
 * i 10.10.1.0/24
                       10.4.5.2
                                                   21 100 0 i <-- INSIDE
 * i
                        10.4.5.2
                                                   21
                                                                   0 i
 *>
                        10.4.5.2
                                                               32768 i
                                                   21
 * i 10.10.2.0/24
                       10.4.5.2
                                                         100
                                                   21
```

```
0 i <-- INSIDE
0 i
* i
                 10.4.5.2
                                      21
                                           100
*>
                 10.4.5.2
                                      21
                                                32768 i
                                               0 i <-- INSIDE
* i 10.10.3.0/24
                10.4.5.2
                                      21 100
* i
                 10.4.5.2
                                                  0 i
                                      21 100
                 10.4.5.2
                                      21
                                                32768 i
*>
                                               0 i <-- INSIDE
                                      21
                10.4.5.2
* i 10.10.4.0/24
                                           100
                                      21
                                           100
* i
                 10.4.5.2
                                                   0 i
                 10.4.5.2
                                     21
                                                32768 i
*>
                                               0 300 20 i <---- HERE
               100.6.83.1
*> 20.20.0.0/16
                                           200
*> 30.30.0.0/16
                                           200
                                                  0 300 30 i <---- HERE
```

[SNIP]

R6#

PfR Configuration

Main configuration commands are the following:

Border Router External Interfaces:

- *cost-minimization nickname*: configures a nickname for a border router interface within a cost-based optimization policy on a master controller. This is useful to quickly have the show command outputs (see later).
- cost-minimization calc {combined | separate | sum}: choose the mode you want to use between combined, separate and summed (as explained in the previous chapter Monthly Sustained Utilization Calculation). Separate is the default here.
- cost-minimization {fixed fee <cost>| tier <percentage> fee <fee>}: choose between a fixed cost billing cycle or a tier-based billing cycle. If you choose a tier-based model, then define the various tiers and the associated fees.
- cost-minimization sampling period <minutes> [rollup <minutes>]: define the rollup period and the sampling interval. For this test, we have defined a very short rollup period and sampling interval which are not representatives of a real-life scenario.

Global policies:

- resolve cost priority X: configure the cost policy
- no resolve xx: disable other policies to avoid optimization conflicts.

```
pfr master
max-range-utilization percent 100
logging
border 10.4.5.6 key-chain pfr
 interface Ethernet0/1 external
  · ------
  ! Nickname for R6-E0/1 is COST-ISP3
  ! Rollup period is 10 min, sampling per minute
  ! Tier-based model:
     up to 80% -> fee=50
  1
     then fee=300
  1
  cost-minimization nickname COST-ISP3
  cost-minimization tier 100 fee 300
  cost-minimization tier 80 fee
  cost-minimization sampling period 1 rollup 10
 interface Ethernet0/0 internal
border 10.4.5.5 key-chain pfr
 interface Ethernet0/1 external
  1 -----
  ! Nickname for R6-E0/1 is COST-ISP2
  ! Rollup period is 10 min, sampling per minute
```

PfR Configuration 10

```
! Tier-based model:
    up to 20% -> fee=200
      from 20% to 60 -> fee=250
  1
     then fee=300
  cost-minimization nickname COST-ISP2
  cost-minimization tier 100 fee
                                       300
  cost-minimization tier 60 fee
                                       250
  cost-minimization tier 20 fee
  cost-minimization sampling period 1 rollup 10
 interface Ethernet0/0 internal
border 10.4.5.4 key-chain pfr
 interface Ethernet0/1 external
  ! Nickname for R6-E0/1 is COST-ISP1
  ! Rollup period is 10 min, sampling per minute
  ! Tier-based model:
      up to 20% -> fee=200
      from 20% to 60 -> fee=250
      then fee=300
  cost-minimization nickname COST-ISP1
  cost-minimization tier 100 fee
  cost-minimization tier 60 fee
  cost-minimization tier 20 fee 200
  cost-minimization sampling period 1 rollup 10
 interface Ethernet0/0 internal
learn
 expire after time 300
max prefix total 10000 learn 10000
mode monitor passive
! Enable cost based policy only
resolve cost priority 1
no resolve delay
no resolve range
no resolve utilization
```

Verifying PfR Cost Minimization Policies

After cost-minimization policies are configured and applied to traffic the show command below allow you to verify that the policy configuration is working as expected.

- sh pfr master exits: will give an overall view and a summary of all metrics for all border routers and external interfaces. This command has been defined explicitly to check the link usage in case of load balancing or cost optimization policies (new command available from 15.2(2)T).
- show pfr master cost-minimization border <ip-address> <interface>
- show pfr master cost-minimization nickname <name>

both commands display the same cost-minimization information. Example here:

sh pfr master cost border 10.4.5.4 Ethernet 0/1 (or sh pfr master cost-minimization nickname COST-ISP1)

sh pfr master cost border 10.4.5.5 Ethernet 0/1 (or sh pfr master cost-minimization nickname COST-ISP2)

sh pfr master cost border 10.4.5.6 Ethernet 0/1 (or sh pfr master cost-minimization nickname COST-ISP3)

Overall: the first step is to check the bandwidth usage on the Border Router external interfaces. There is a new command that summarize all informations relative to external interface bandwidth utilization. You can also use the sh pfr master border detail command.

MC# sh pfr master exits

PfR Master Controller Exits:

General Info:

E - External I - Internal

N/A - Not Applicable

ID Name	Border	Interface	ifIdx IP Address	Mask Policy	Up/ Type Down
6	10.4.5.6	Et0/1	2 100.6.83.6	24 Cost & Util	E UP
5	10.4.5.5	Et0/1	2 100.5.82.5	24 Cost & Util	E UP
4	10.4.5.4	Et0/1	2 100.4.81.4	24 Cost & Util	E UP

Global Exit Policy:

Range Egress: In Policy - Max difference 43% between Exits 4 & 6 - Policy 100% Range Ingress: Out of Policy - Max difference 12% between Exits 6 & 4 - Policy 0% Util Egress: In Policy Util Ingress: In Policy

Cost: In Policy

Exits Performance:

Egress						Ingress						
ID (Capacity	MaxUtil	Usage	 %	RSVP POOL	OOP	Capacity	MaxUtil	Usage	 %	00P	
6	2000	1800	1164	58	N/A	Cost	2000	2000	0	0	N/A	
5	2000	1800	330	16	N/A	Cost	2000	2000	0	0	N/A	
4	2000	1800	305	15	N/A	Cost	2000	2000	241	12	N/A	

TC and BW Distribution:

Name/ID	# c Current Cor	of TCs strolled Ir	nPolicy	BW (kbps) Controlled	Total		Active Unreach (fpm)
6	31	31	31	1130	1164	0	0
5	6	6	6	317	330	0	0
4	5	5	5	330	305	0	0

Exit Related TC Stats:

Priority

highest nth

Number of TCs with range:	0	0
Number of TCs with util:	0	0
Number of TCs with cost:	1	41
Total number of TCs:	42	
MC#		

Notes:

- Global Exit Policy: we do not care about the range policy because we use the cost policy. Outgoing range we defined as 100% which explains why it is marked as In Policy.
- Exits Performance: this part is more interesting here because it gives the bandwidth repartition between all external interfaces. No surprise here, R6 has more bandwidth because it's fee is lower (50) than the other up to 80%. Note that we only have egress bandwidth optimization defined, and R4 is the only ingress BR used (follows BGP rules).
- TC and BW Distribution: gives the Traffic Classes repartition on all exits.

Details per ISP: the next step would be to check the details for each ISP

```
MC# sh pfr master cost-minimization nickname COST-ISP1
pM - per Month, pD - per Day
-----
Nickname : COST-ISP1 Border: 10.4.5.4 Interface: Et0/1
 Calc type : Separate
 End Date : 0
 Summer time: Disabled
            : Tier Based
                Tier 1: 100, fee: 300
                Tier 2: 60, fee:
Tier 3: 20, fee:
                                                250
                                                 200
 Period : Sampling 1, Rollup 10
 Discard : Type Absolute, Value 5
 Rollup Information:
 Total(pM) Discard(pM) Remaining(pM) Collected(pM)
                                           1222
 Current Rollup Information:

MomentaryTgtUtil: 400 Kbps CumRxBytes:
StartingRollupTgt: 400 Kbps CumTxBytes:
CurrentRollupTgt: 400 Kbps TimeRemain:
                                                                               13243971
                                                                                  17672897
                                                                                00:02:59
 Rollup Utilization (Kbps):
 Egress Utilization Rollups (Descending order)

      1
      : 0
      2
      : 1108
      3
      : 758
      4
      : 686

      5
      : 319
      6
      : 319
      7
      : 318
      8
      : 318

      9
      : 316
      10
      : 0
      11
      : 0
      12
      : 0

 Ingress Utilization Rollups (Descending order)

      2
      : 283
      3
      : 269
      4
      : 24

      6
      : 239
      7
      : 238
      8
      : 23

      10
      : 0
      11
      : 0
      12
      : 0

 1 : 0
                                                                          4 : 240
 5 : 239
9 : 209
                                                                           8 : 237
MC#
```

Notes:

- Calc type : Separate (default)
- Period: Sampling 1, Rollup 10 10 minutes rollup with a sampling interval of 1 minute (this is just for the test and is not a recommended value for real life deployment).
- Discard: Type Absolute, Value 5 the top 5 values are discarded in each column (egress, ingress).
- Rollup Utilization: gives you the rollup values

```
MC# sh pfr master cost-minimization nickname COST-ISP2
 pM - per Month, pD - per Day
______
 Nickname : COST-ISP2 Border: 10.4.5.5 Interface: Et0/1
 Calc type : Separate
 End Date : 0
 Summer time: Disabled
           : Tier Based
             Tier 1: 100, fee: 300
Tier 2: 60, fee: 250
            Tier 2: 60, fee:
Tier 3: 20, fee:
                                       200
 Period : Sampling 1, Rollup 10
 Discard : Type Absolute, Value 5
 Rollup Information:
 Total(pM) Discard(pM) Remaining(pM) Collected(pM)
                 5
 4320
                                  1222 11
 Current Rollup Information:
 MomentaryTgtUtil: 400 Kbps CumRxBytes: 5579
StartingRollupTgt: 400 Kbps CumTxBytes: 16557729
CurrentRollupTgt: 400 Kbps TimeRemain: 00:02:59
 Rollup Utilization (Kbps):
 Egress Utilization Rollups (Descending order)

      : 0
      2
      : 476
      3
      : 358

      : 306
      6
      : 302
      7
      : 300

      : 105
      10
      : 0
      11
      : 0

                                                            4 : 317
8 : 300
   : 0
                                                             12 : 0
 Ingress Utilization Rollups (Descending order)
 1 : 0
                    2 : 0
                                         3 : 0
                                                             4 : 0
                   6 : 0 7 : 0
10 : 0 11 : 0
                                                        8 : 0
12 : 0
 5 : 0
 9 : 0
MC#
```

```
MC# sh pfr master cost-minimization nickname COST-ISP3

pM - per Month, pD - per Day

Nickname : COST-ISP3 Border: 10.4.5.6 Interface: Et0/1
```

Calc type : Separate

End Date : 0

Summer time: Disabled Fee : Tier Based

```
Tier 1: 100, fee:
                                300
          Tier 2: 80, fee:
                                50
Period
         : Sampling 1, Rollup 10
Discard : Type Absolute, Value 5
Rollup Information:
Total(pM) Discard(pM) Remaining(pM) Collected(pM)
                           1222
4320
                                         11
Current Rollup Information:
  MomentaryTgtUtil: 1600 Kbps CumRxBytes:
                                                       5820
                       1600 Kbps CumTxBytes:
1600 Kbps TimeRemain:
 StartingRollupTgt:
                                                  59928524
  CurrentRollupTgt: 1600 Kbps
                                                    00:02:59
Rollup Utilization (Kbps):
Egress Utilization Rollups (Descending order)
                                             4 : 1105
8 : 738
                2:1147
                                3 : 1141
1 : 0
                               7 : 744
   : 1103
               6 : 1087
9:592 10:0 11:0
                                                12 : 0
Ingress Utilization Rollups (Descending order)
                                              4 : 0
8 : 0
               2 : 0
                               7 : 0
               6 : 0
5 : 0
9
   : 0
               10 : 0
                            11 : 0
MC#
```

Verifying Enforcement

The first step is to look at the traffic classes and check that everything is in policy and what is the BR and external interface used. Only part of the output is displayed below with a focus on a few prefixes only:

```
MC#sh pfr master traffic-class
OER Prefix Statistics:
Pas - Passive, Act - Active, S - Short term, L - Long term, Dly - Delay (ms),
P - Percentage below threshold, Jit - Jitter (ms),
MOS - Mean Opinion Score
Los - Packet Loss (packets-per-million), Un - Unreachable (flows-per-million),
E - Egress, I - Ingress, Bw - Bandwidth (kbps), N - Not applicable
U - unknown, * - uncontrolled, + - control more specific, @ - active probe all
 # - Prefix monitor mode is Special, & - Blackholed Prefix
 % - Force Next-Hop, ^ - Prefix is denied
                 Appl_ID Dscp Prot SrcPort DstPort SrcPrefix State Time CurrBR CurrI/F B
DstPrefix
                                                 CurrBR CurrI/F Protocol
         Flags
        PasSDly PasLDly PasSUn
                                PasLUn PasSLos PasLLos
                                                          EBw IBw
       ActSDly ActLDly ActSUn ActLUn ActSJit ActPMOS ActSLos ActLLos
                   20.20.0.0/24
                                                                       BGP
           111
             N
                       N N N N N INPOLICY 0
20.20.8.0/24
                                            10.4.5.6 Et0/1
                                                                        BGP
```

153	155	0		0	715	414	3	7 4
N	N	N		N	N	N		
20.20.16.0/24		N N	N		N	N	N	
		INPOLICY		0		10.4.5.4	Et0/1	BGP
52	52	0		0	121	77	6	7 7
N	N	N		N	N	N		
30.30.0.0/24		N N	N		N	N	N	
		INPOLICY		0		10.4.5.6	Et0/1	BGP
153	154	0		0	477	401	3	5 4
N	N	N		N	N	N		
30.30.8.0/24		N N	N		N	N	N	
		INPOLICY		0		10.4.5.5	Et0/1	BGP
104	104	0		0	0	125	5	2 6
N	N	N		N	N	N		

[SNIP]

Let's focus on the following prefixes:

• 20.20.0.0/24: exit is R5

• 20.20.8.0/24: exit is R6

• 20.20.16.0/24: exit is R4

• 30.30.0.0/24: exit is R6

• 30.30.8.0/24: exit is R5

The next step is to look at the BGP routing table. By default the path for a specific prefix is enforced by setting the Local Preference to 5000 on the BR/Interface that was chosen by the PfR Master Controller.

```
R2#sh bgp
BGP table version is 184, local router ID is 10.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal, r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter, x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network

Next Hop

Metric LocPrf Weight Path

*>i 20 20 0 0/24

100 5 82 1

0 5000

0 200 20 i <--- HER
```

		•	•										
	Network	Next Hop	Metric	LocPrf	Weight	Pat	h						
*>i	20.20.0.0/24	100.5.82.1	0	5000	0	200	20	i	<	HERE:	exit	is	through
*>i	20.20.0.0/16	100.6.83.1	0	200	0	300	20	i	<	PARENT	ROU1	Έ	
*>i	20.20.1.0/24	100.6.83.1	0	5000	0	300	20	i					
*>i	20.20.2.0/24	100.6.83.1	0	5000	0	300	20	i					
*>i	20.20.3.0/24	100.6.83.1	0	5000	0	300	20	i					
*>i	20.20.4.0/24	100.4.81.1	0	5000	0	100	20	i					
*>i	20.20.5.0/24	100.6.83.1	0	5000	0	300	20	i					
*>i	20.20.6.0/24	100.6.83.1	0	5000	0	300	20	i					
*>i	20.20.7.0/24	100.4.81.1	0	5000	0	100	20	i					
*>i	20.20.8.0/24	100.6.83.1	0	5000	0	300	20	i	<	HERE:	exit	is	through
[SNIE	?]												_
*>i	20.20.16.0/24	100.4.81.1	0	5000	0	100	20	i	<	HERE:	exit	is	through
*>i	30.30.0.0/24	100.6.83.1	0	5000	0	300	30	i	<	HERE:	exit	is	through
*>i	30.30.0.0/16	100.6.83.1	0	200	0	300	30	i	<	PARENT	ROU1	Έ	_

```
*>i 30.30.1.0/24
                      100.6.83.1
                                                   5000
                                                              0 300 30 i
*>i 30.30.2.0/24
                     100.6.83.1
                                               0
                                                   5000
                                                              0 300 30 i
                                                   5000
*>i 30.30.3.0/24
                     100.6.83.1
                                               0
                                                              0 300 30 i
*>i 30.30.4.0/24
                     100.6.83.1
                                               \cap
                                                   5000
                                                             0 300 30 i
*>i 30.30.5.0/24
                     100.6.83.1
                                               Λ
                                                   5000
                                                             0 300 30 i
*>i 30.30.6.0/24
                     100.6.83.1
                                               Ω
                                                   5000
                                                             0 300 30 i
*>i 30.30.7.0/24
                     100.5.82.1
                                               Ω
                                                   5000
                                                              0 200 30 i
*>i 30.30.8.0/24
                     100.5.82.1
                                               Ω
                                                   5000
                                                              0 200 30 i <-- HERE: exit is through
[SNIP]
*>i 30.30.16.0/24
                     100.6.83.1
                                                   5000
                                                              0 300 30 i
```

[SNIP]

R2#

Then, we can check on each BR the BGP routes that are enforced by the Master Controller:

```
R4#sh pfr border routes bgp
BGP table version is 178, local router ID is 10.4.4.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
OER Flags: C - Controlled, X - Excluded, E - Exact, N - Non-exact, I - Injected
  Network
                    Next Hop
                                    OER
                                           LocPrf Weight Path
*>i20.20.0.0/24
                    100.5.82.1
                                            5000
                                                      0 200 20 i <-- CONTROLLED BY R5
                                    XN
*>i20.20.1.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 20 i
*>i20.20.2.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 20 i
*>i20.20.3.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 20 i
*> 20.20.4.0/24
                    100.4.81.1
                                    CEI
                                             50
                                                      0 100 20 i
*>i20.20.5.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 20 i
*>i20.20.6.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 20 i
*> 20.20.7.0/24
                    100.4.81.1
                                    CEI
                                             50
                                                      0 100 20 i
                                                      0 300 20 i
*>i20.20.8.0/24
                    100.6.83.1
                                    XN
                                            5000
[SNIP]
*> 20.20.16.0/24
                                              50
                   100.4.81.1
                                    CEI
                                                      0 100 20 i <-- LOCALLY CONTROLLED
[SNIP]
*>i30.30.0.0/24
                   100.6.83.1
                                            5000
                                                      0 300 30 i
                                    XN
*>i30.30.1.0/24
                    100.6.83.1
                                            5000
                                                      0 300 30 i
                                    XN
*>i30.30.2.0/24
                    100.6.83.1
                                    XN
                                            5000
                                                      0 300 30 i
                                                      0 300 30 i
*>i30.30.3.0/24
                    100.6.83.1
                                    XN
                                            5000
                   100.6.83.1
                                                     0 300 30 i
*>i30.30.4.0/24
                                    XN
                                            5000
*>i30.30.5.0/24
                   100.6.83.1
                                                     0 300 30 i
                                    XN
                                            5000
*>i30.30.6.0/24
                   100.6.83.1
                                    XN
                                            5000
                                                     0 300 30 i
*>i30.30.7.0/24
                   100.5.82.1
                                    XN
                                            5000
                                                     0 200 30 i
*>i30.30.8.0/24
                   100.5.82.1
                                    XN
                                            5000
                                                     0 200 30 i
[SNIP]
```

Notes:

R4#

• The ?X? under the OER column for the 20.20.0.0/24 route on R4 means that the route is not locally controlled. Meaning that the local preference 5000 is being injected from another router (in that case

- R5). When the ?X? attribute is set, the exact vs. non-exact is meaningless.
- The prefixe 20.20.16.0/24 is locally controlled by R4. The ?exact? means that the 20.20.16.0/24 route is in the BGP table and there are no more specific subnets underneath. This route is also marked as 'injected', because only the parent route 20.20.0.0/16 was in the BGP routing table before PfR kicked in.
- Also note that in the LocPrf column, the local preference value displayed for locally controlled prefixes is the one that is manually configured in the BGP configuration (in R4 case, local preference of 50 was assigned to 20.20.0.0/16 and 30.30.0.0/16 routes).

```
R5#sh pfr border routes bgp
BGP table version is 156, local router ID is 10.5.5.5
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
             r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
             x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
OER Flags: C - Controlled, X - Excluded, E - Exact, N - Non-exact, I - Injected
                                   OER
                                          LocPrf Weight Path
  Network
                   Next Hop
*> 20.20.0.0/24
                   100.5.82.1
                                   CEI
                                           100
                                                    0 200 20 i <-- LOCALLY CONTROLLED
*>i20.20.1.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                     0 300 20 i
*>i20.20.2.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                    0 300 20 i
                                                    0 300 20 i
*>i20.20.3.0/24
                   100.6.83.1
                                   XN
                                           5000
*>i20.20.4.0/24
                                                    0 100 20 i
                   100.4.81.1
                                   XN
                                           5000
                                                    0 300 20 i
*>i20.20.5.0/24
                   100.6.83.1
                                   XN
                                           5000
*>i20.20.6.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                    0 300 20 i
                                                    0 300 20 i <-- CONTROLLED BY R6
*>i20.20.8.0/24
                   100.6.83.1
                                   XN
                                           5000
[SNIP]
                                           5000
*>i30.30.0.0/24
                   100.6.83.1
                                   XN
                                                    0 300 30 i
*>i30.30.1.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                    0 300 30 i
*>i30.30.2.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                   0 300 30 i
*>i30.30.3.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                   0 300 30 i
*>i30.30.4.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                   0 300 30 i
*>i30.30.5.0/24
                   100.6.83.1
                                   XN
                                           5000
                                                   0 300 30 i
                                           5000
                                                   0 300 30 i
*>i30.30.6.0/24
                   100.6.83.1
                                   XN
                                                   0 200 30 i
*> 30.30.7.0/24
                   100.5.82.1
                                   CEI
                                           100
                                           100
                                                    0 200 30 i
*> 30.30.8.0/24
                   100.5.82.1
                                   CEI
[SNIP]
```

Notes:

R5#

- The ?X? under the OER column for the 20.20.8.0/24 route on R5 means that the route is not locally controlled. Meaning that the local preference 5000 is being injected from another router (in that case R6). When the ?X? attribute is set, the exact vs. non-exact is meaningless.
- The prefixe 20.20.0.0/24 is locally controlled by R5. The ?exact? means that the 20.20.0.0/24 route is in the BGP table and there are no more specific subnets underneath. This route is also marked as 'injected', because only the parent route 20.20.0.0/16 was in the BGP routing table before PfR kicked in
- Also note that in the LocPrf column, the local preference value displayed for locally controlled prefixes is the one that is manually configured in the BGP configuration (in R5 case, local preference of 100 was assigned to 20.20.0.0/16 and 30.30.0.0/16 routes).

```
R6#sh pfr border routes bgp
BGP table version is 185, local router ID is 10.6.6.6
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
              r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
              x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
OER Flags: C - Controlled, X - Excluded, E - Exact, N - Non-exact, I - Injected
                                      OER
                                             LocPrf Weight Path
   Network
                     Next Hop
                                                     0 200 20 i <-- CONTROLLED BY R5
*>i20.20.0.0/24
                    100.5.82.1
                                      XN
                                              5000
*> 20.20.1.0/24
                    100.6.83.1
                                     CET
                                               200
                                                        0 300 20 i
*> 20.20.2.0/24
                    100.6.83.1
                                     CET
                                               200
                                                        0 300 20 i
*> 20.20.3.0/24
                    100.6.83.1
                                     CEI
                                              200
                                                       0 300 20 i
*>i20.20.4.0/24
                   100.4.81.1
                                     XN
                                              5000
                                                       0 100 20 i
                                              200 0 300 20 i
200 0 300 20 i
5000 0 100 20 i
200 0 300 20 i <-- LOCALLY CONTROLLED
                                     CEI
*> 20.20.5.0/24
                   100.6.83.1
*> 20.20.6.0/24
                   100.6.83.1
                                     CEI
*>i20.20.7.0/24
                   100.4.81.1
                                     XN
*> 20.20.8.0/24
                   100.6.83.1
                                      CEI
[SNIP]
                                                    0 100 20 i <-- CONTROLLED BY R4
*>i20.20.16.0/24
                    100.4.81.1
                                      XN
                                              5000
[SNIP]
                    100.6.83.1 CEI
100.5.82.1 XN
                                                        0 300 30 i
*> 30.30.0.0/24
                                               200
                                     CEI
                                               200
                                                         0 300 30 i
*> 30.30.1.0/24
                                     CEI
*> 30.30.2.0/24
                                               200
                                                        0 300 30 i
*> 30.30.3.0/24
                                               200
                                                        0 300 30 i
                                     CEI
*> 30.30.4.0/24
                                               200
                                                        0 300 30 i
*> 30.30.5.0/24
                                               200
                                                        0 300 30 i
                                     CEI
                                               200
                                                        0 300 30 i
*> 30.30.6.0/24
                                     XN
XN
*>i30.30.7.0/24
                                              5000
                                                        0 200 30 i
                                                       0 200 30 i
*>i30.30.8.0/24
                                              5000
[SNIP]
```

R6#

Notes:

- The ?X? under the OER column for the 20.20.0.0/24 route on R6 means that the route is not locally controlled. Meaning that the local preference 5000 is being injected from another router (in that case R5). When the ?X? attribute is set, the exact vs. non-exact is meaningless.
- The prefixe 20.20.8.0/24 is locally controlled by R6. The ?exact? means that the 20.20.8.0/24 route is in the BGP table and there are no more specific subnets underneath. This route is also marked as 'injected', because only the parent route 20.20.0.0/16 was in the BGP routing table before PfR kicked in.
- Also note that in the LocPrf column, the local preference value displayed for locally controlled prefixes is the one that is manually configured in the BGP configuration (in R4 case, local preference of 200 was assigned to 20.20.0.0/16 and 30.30.0.0/16 routes).

Conclusion

Configuring and using PfR cost policies is straight forward. If you want to review more information about PfR Cost Policies, see the <u>Configuration Guide</u>

Conclusion 20