


Contents

- [1 Introduction](#)
- [2 Example](#)
 - ◆ [2.1 Commonly Asked Question](#)
- [3 Related show Commands](#)
- [4 Related Information](#)

Introduction

This configuration example demonstrates how to setup a static SAF peering across a non-SAF enabled network.

Example

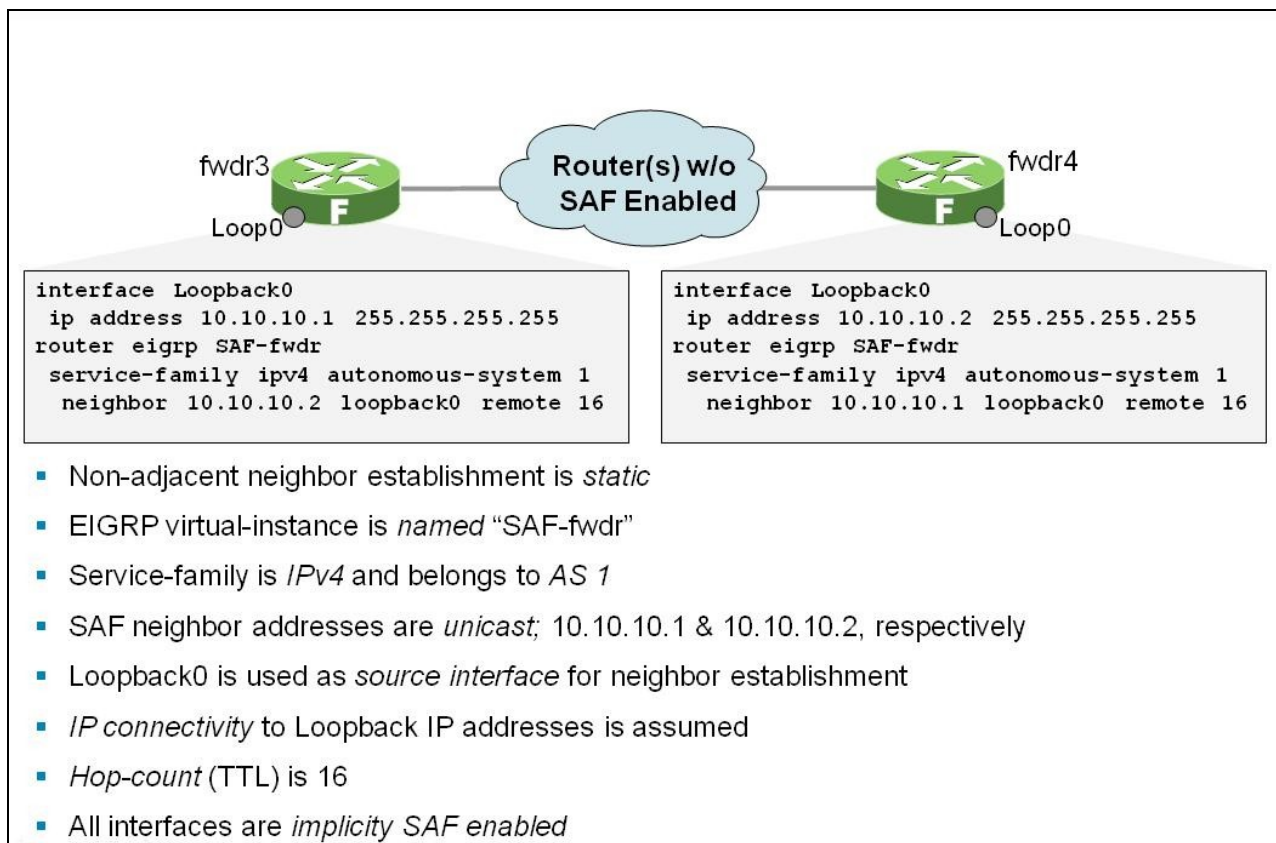

Commonly Asked Question

Q: Will SAF work across a Service Provider MPLS network?

A: Yes

Related show Commands

show eigrp service-family ipv4 neighbors

```
fwdr3#sh eigrp service-family ipv4 neighbors
```

```
EIGRP-SFv4 VR(saf) Service-Family Neighbors for AS(1)
```

H	Address	Interface	Hold Uptime (sec)	SRTT (ms)	RTO	Q Cnt	Seq Num
0	10.10.10.2	Lo0	13 00:12:36	44	264	0	6

```
fwdr4#sh eigrp service-family ipv4 neighbors
```

```
EIGRP-SFv4 VR(saf) Service-Family Neighbors for AS(1)
```

H	Address	Interface	Hold Uptime (sec)	SRTT (ms)	RTO	Q Cnt	Seq Num
0	10.10.10.1	Lo0	13 00:13:36	44	264	0	6

Related Information

[Technical Support & Documentation - Cisco Systems](#) [SAF Product Page - Cisco Systems](#) [Cisco IOS SAF Configuration Guide - Cisco Systems](#)