


## Contents

- [1 Introduction](#)
- [2 Example](#)
  - ◆ [2.1 Commonly Asked Question](#)
- [3 Related show Commands](#)
- [4 Related Information](#)

## Introduction

This configuration example demonstrates how to setup a static SAF peering across a non-SAF enabled network.

## Example

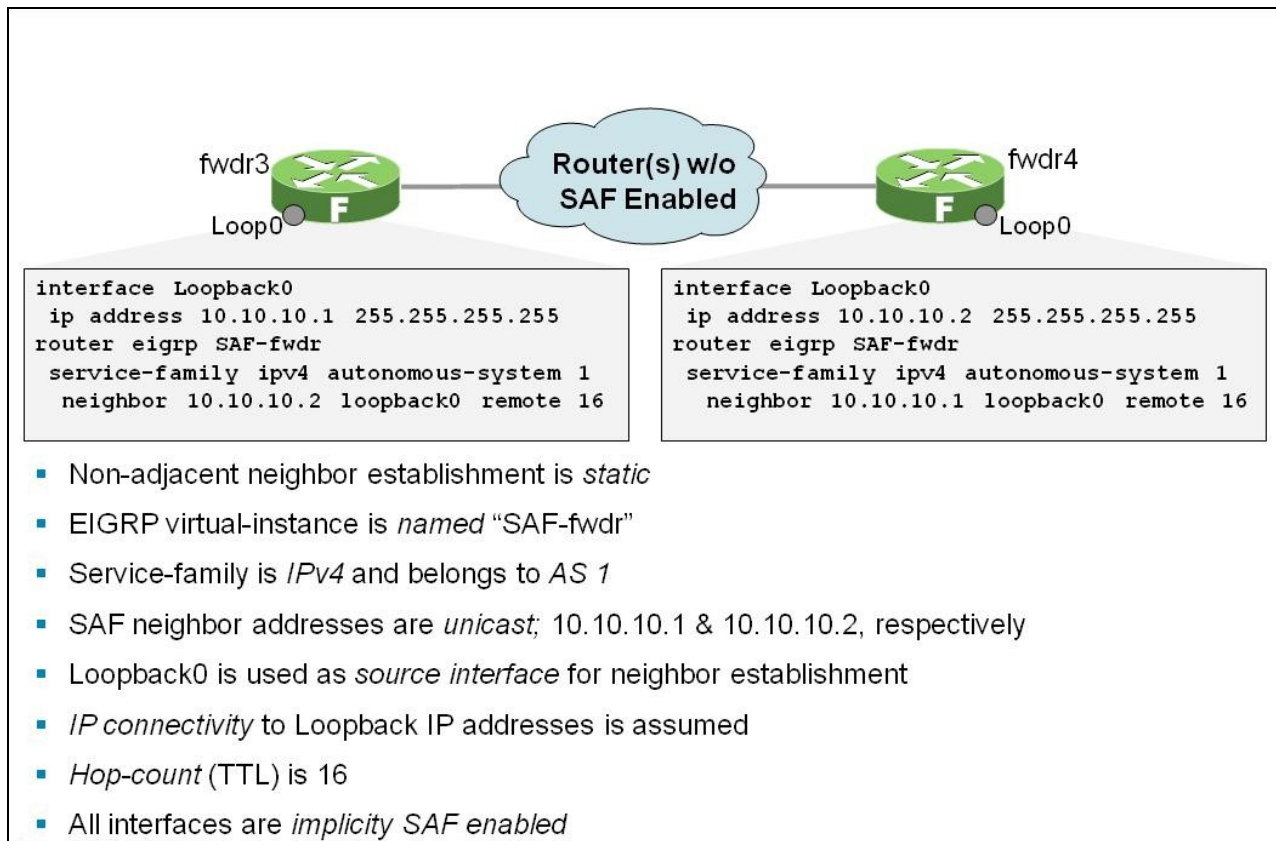

## Commonly Asked Question

Q: Will SAF work across a Service Provider MPLS network?

A: Yes

## Related show Commands

show eigrp service-family ipv4 neighbors

```
fwdr3#sh eigrp service-family ipv4 neighbors
EIGRP-SFv4 VR(saf) Service-Family Neighbors for AS(1)
H  Address                Interface    Hold Uptime  SRTT    RTO    Q    Seq
                               (sec)       (ms)        Cnt    Num
0  10.10.10.2              Lo0         13 00:12:36  44      264    0     6
```

```
fwdr4#sh eigrp service-family ipv4 neighbors
EIGRP-SFv4 VR(saf) Service-Family Neighbors for AS(1)
H  Address                Interface    Hold Uptime  SRTT    RTO    Q    Seq
                               (sec)       (ms)        Cnt    Num
0  10.10.10.1              Lo0         13 00:13:36  44      264    0     6
```

---

## Related Information

[Technical Support & Documentation - Cisco Systems SAF Product Page - Cisco Systems](#) [Cisco IOS SAF Configuration Guide - Cisco Systems](#)