

Main page: [Cisco Unity Express -- REST PI Service Operations](#)

Previous page: [Cisco Unity Express -- Business Schedule and Holidays REST PI Service Operation](#)

Next page: [Cisco Unity Express -- Restriction Tables REST PI Service Operation](#)

Search the Cisco Unity Express documentation on the DocWiki:

Loading


Contents

- [1 Language and Prompts](#)
 - ◆ [1.1 Classes](#)
 - ◇ [1.1.1 Language](#)
 - ◇ [1.1.2 Prompt](#)
 - ◆ [1.2 Resources](#)
 - ◇ [1.2.1 Language](#)
 - ◇ [1.2.2 Prompts](#)

Language and Prompts

Classes

Figure 10: Language and Prompt

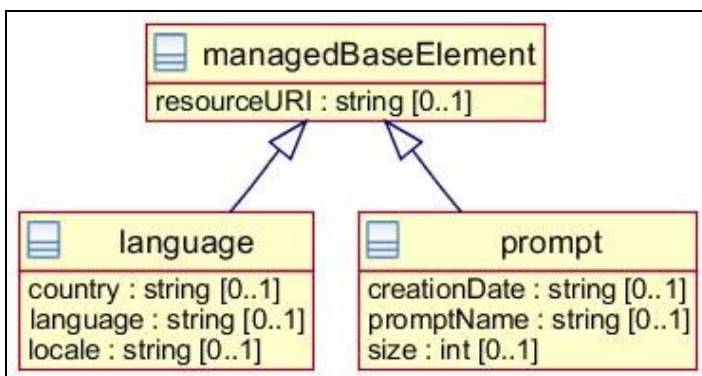

Cisco_Unity_Express_--_Language_and_Prompts_REST_API_Service_Operation

Language

Class Name	Language		
Extends From	ManagedBaseElement		
Description	Represents a language installed in the system.		
XML Namespace	http://language.model.rest.aesop.cisco.com		
Field Name	Type	Constraints	Comments
locale	String	Specified as xx_YY where xx is the language code and YY is the country code. For example, en_US.	Locale name represented by this language.
language	String		Full language name. For example, "English" for locale "en_US".
country	String		Full country name. For example, "United States" for locale value "en_US".

Prompt

Class Name	Prompt		
Extends From	ManagedBaseElement		
Description	Represents a prompt file installed in the system.		
XML Namespace	http://language.model.rest.aesop.cisco.com		
Field Name	Type	Constraints	Comments
promptName	String		Name of the prompt file.
size	Integer	Read Only	Size of the file (in Bytes)
creationDate	String	Read Only	Date when the prompt file was created

Resources

Language

Resource URI	Operation	Input	Return Value
/languages	GET (read all languages installed)	BaseElementList (containing list of Language objects)	
/languages/{lang}	GET (Read an installed		Language

Cisco_Unity_Express_--_Language_and_Prompts_REST_API_Service_Operation

	language)		
/languages/default	GET (Read system default language)		Language
	PUT (Set a language as system default)	Language	

Prompts

Resource URI	Operation	Input	Return Value
/languages/{language}/prompts/user	GET (read information about all prompts)		BaseElementList (containing list of Prompt objects)
/languages/{language}/prompts/user/{promptname} While uploading audio wav file, use query parameter overwrite to replace any file with the same name.	GET (Read information about an installed prompt)	Accept: application/xml	Prompt
/languages/{language}/prompts/user/{prompt name}?overwrite=true	GET (Download the audio wav file for a prompt)	Accept: audio/x-wav	The prompt audio wav file
	PUT Update prompt (change prompt file name)	Content-type: application/xml Prompt	
	PUT (Upload prompt audio wav file)	Content-type: audio/x-wav Prompt wav file	
	DELETE (Delete prompt file from server)		