

Contents

- 1 Scenario Setup
- 2 Problem Statement
- 3 Standalone Routing Engine
- 4 Integrated Routing Engine - EAAS to MR PIM
 - ◆ 4.1 NEW_TASK
 - ◆ 4.2 Login and go "ready for other channels."
 - ◆ 4.3 DO THIS WITH TASK
 - ◆ 4.4 DialogueID
- 5 Listener to CTI Server
 - ◆ 5.1 Offer Task
 - ◆ 5.2 Start Task
 - ◆ 5.3 End Task
- 6 Audit Trail
- 7 Call Flow
- 8 Resolution

Scenario Setup

Use integrated agent "goofy" for this scenario. (Do not log in yet)

Throughout the life of the mail, use the below query to follow the activity:

```
select top(10) egpl_routing_queue.queue_name, * from egpl_casemgmt_activity LEFT OUTER JOIN egpl_r
```

Problem Statement

Understand how a mail goes through the Integrated Routing Engine.

Standalone Routing Engine

Once an email activity enters the 4000/4100 state, it is routed to an agent within a few seconds.

Integrated Routing Engine - EAAS to MR PIM

NEW_TASK

The External Agent Assignment Service (EAAS) then picks up the activity in activity_status/activity_sub_status 4000/4100, sets activity_sub_status to 4105, and processes the task through a UCCE Routing Script via a NEW_TASK message sent to the MR PIM.

```
12:42:34:878 pg2A-pim2 Trace: [ 4900]Application->PG:
Message = NEW_TASK; Length = 102 bytes
  DialogueID = (1) Hex 00000001
  SendSeqNo = (1) Hex 00000001
  MRDomainID = (5003) Hex 0000138b
  PreviousTask = -1:-1:-1
  PreferredAgent = Undefined
```

IPTA_Email

```
Service = (0) Hex 00000000
CiscoReserved = (0) Hex 00000000
ScriptSelector: 8000
ECC Variable Name: user.cim.activity.id
Value: 1178
```

The activity_sub_status remains 4105 ("Ready for Unified CCE routing") while the task is queued.

queue_name	ACTIVITY_ID	CASE_ID	DEPARTMENT_ID	ACTIVITY_MODE	ACTIVITY_TYPE	ACTIVITY_SUB_TYPE	ACTIVITY_STATUS	ACTIVITY_SUB_STATUS	ACTIVITY_PRIORITY	WHEN_CREATED	WHO_CREATED
EIM_INBOUND	1178	1081	999	100	1	1	4000	4105	NULL	2011-05-16 16:42:04.973	12

Login and go "ready for other channels."

Your integrated agent should receive the email sent in the previous scenario.

DO_THIS_WITH_TASK

Once UCCE determines an agent is available for the task, MR PIM returns a DO_THIS_WITH_TASK message to EAAS with routing instructions.

```
12:42:35:722 pg2A-pim2 Trace: [ 5356]PG->Application:
Message = DO_THIS_WITH_TASK; Length = 121 bytes
DialogueID = (1) Hex 00000001
SendSeqNo = (1) Hex 00000001
IcmTaskID = 149884:201: 1
SkillGroup = (5036) Hex 000013ac
Service = Undefined
Agent = (5005) Hex 0000138d
AgentInfo: 1002
Label:
ApplicationString2:
Call Variable 1:
Call Variable 2:
Call Variable 3:
Call Variable 4:
Call Variable 5:
Call Variable 6:
Call Variable 7:
Call Variable 8:
Call Variable 9:
Call Variable 10:
ECC Variable Name: user.cim.activity.id
Value: 1178
```

DialogueID

Note the DialogueID in the above messages. This field can be used to correlate messages MR PIM logs, and is particularly useful for those that do not show the user.cim.activity.id ECC variable.

- Assume we find a NEW_TASK_FAILURE_EVENT in the MR PIM logs:

```
01:07:52 pg5A-pim1 Trace: PG->Application:
Message = NEW_TASK_FAILURE_EVENT; Length = 12 bytes
DialogueID = (683) Hex 000002ab
SendSeqNo = (1) Hex 00000001
ReasonCode = (209) Hex 000000d1
```

- This can be linked to the original NEW_TASK with the DialogueID:

NEW_TASK

IPTA_Email

```
12:11:32 pg5A-pim1 Trace: Application->PG:
Message = NEW_TASK; Length = 73 bytes
  DialogueID = (683) Hex 000002ab
...etc
```


- Note that the DialogueID can also be used to link the DO_THIS_WITH_TASK:

```
12:11:32 pg5A-pim1 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 63 bytes
  DialogueID = (683) Hex 000002ab
...etc
```

Listener to CTI Server

Offer Task

When a ready agent is offered the task, the activity appears as a bold line in the Main Inbox. The activity_status is 5000 and activity_sub_status is 5100 ("New").

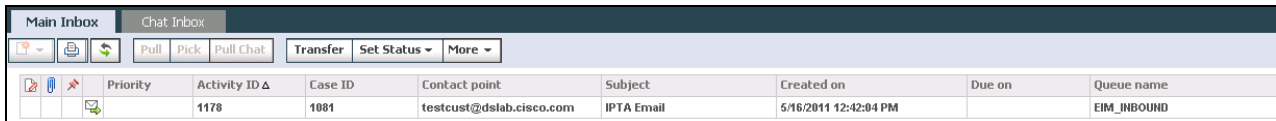


The screenshot shows the 'Main Inbox' interface with a table of activities. The first activity is highlighted in bold text. The table columns are: Priority, Activity ID Δ, Case ID, Contact point, Subject, Created on, Due on, and Queue name.

Priority	Activity ID Δ	Case ID	Contact point	Subject	Created on	Due on	Queue name
	1178	1081	testcust@dslab.cisco.com	IPTA Email	5/16/2011 12:42:04 PM		EIM_INBOUND

queue_name	ACTIVITY_ID	CASE_ID	DEPARTMENT_ID	ACTIVITY_MODE	ACTIVITY_TYPE	ACTIVITY_SUB_TYPE	ACTIVITY_STATUS	ACTIVITY_SUB_STATUS	ACTIVITY_PRIORITY	WHEN_CREATED	WHO_CREATED
EIM_INBOUND	1178	1081	999	100	1	1	5000	5100	NULL	2011-05-16 16:42:04.973	12

Start Task

The task is not "started" until the agent clicks the activity in their Main Inbox and it changes from bold to regular text. The activity_status is 5000 and activity_sub_status is 5900 ("In Progress").



The screenshot shows the 'Main Inbox' interface with a table of activities. The first activity is now in regular text. The table columns are: Priority, Activity ID Δ, Case ID, Contact point, Subject, Created on, Due on, and Queue name.

Priority	Activity ID Δ	Case ID	Contact point	Subject	Created on	Due on	Queue name
	1178	1081	testcust@dslab.cisco.com	IPTA Email	5/16/2011 12:42:04 PM		EIM_INBOUND

queue_name	ACTIVITY_ID	CASE_ID	DEPARTMENT_ID	ACTIVITY_MODE	ACTIVITY_TYPE	ACTIVITY_SUB_TYPE	ACTIVITY_STATUS	ACTIVITY_SUB_STATUS	ACTIVITY_PRIORITY	WHEN_CREATED	WHO_CREATED
EIM_INBOUND	1178	1081	999	100	1	1	5000	5900	NULL	2011-05-16 16:42:04.973	12

End Task

Once the agent types a response and completes the activity, the activity_status changes to 9000 and activity_sub_status to 9100 ("Done").

queue_name	ACTIVITY_ID	CASE_ID	DEPARTMENT_ID	ACTIVITY_MODE	ACTIVITY_TYPE	ACTIVITY_SUB_TYPE	ACTIVITY_STATUS	ACTIVITY_SUB_STATUS	ACTIVITY_PRIORITY	WHEN_CREATED	WHO_CREATED
EIM_INBOUND	1178	1081	999	100	1	1	9000	9100	NULL	2011-05-16 16:42:04.973	12

Audit Trail


1. Log in to the UI as an agent
2. Click "Search"
3. Select Object Type > Activity
4. Enter activity_id in the value box, press enter
5. Click Start Search

Properties: 1178

Activity body | Activity details | Case details | Audit | Classification

Actor	Action	Date
system	New incoming mail	5/16/2011 12:42:05 PM
system	New case created	5/16/2011 12:42:22 PM
system	Activity assigned to new case 1081	5/16/2011 12:42:22 PM
system	Assigned to queue EIM_INBOUND	5/16/2011 12:42:22 PM
system	Auto acknowledged	5/16/2011 12:42:22 PM
system	Applied inbound workflow DSLab Inbound Workflow	5/16/2011 12:42:22 PM
system	Assigned to JDoe	5/16/2011 12:42:38 PM
JDoe	Read in progress	5/16/2011 12:48:10 PM
JDoe	Replied	5/16/2011 12:50:02 PM
JDoe	Activity completed	5/16/2011 12:50:02 PM

Call Flow

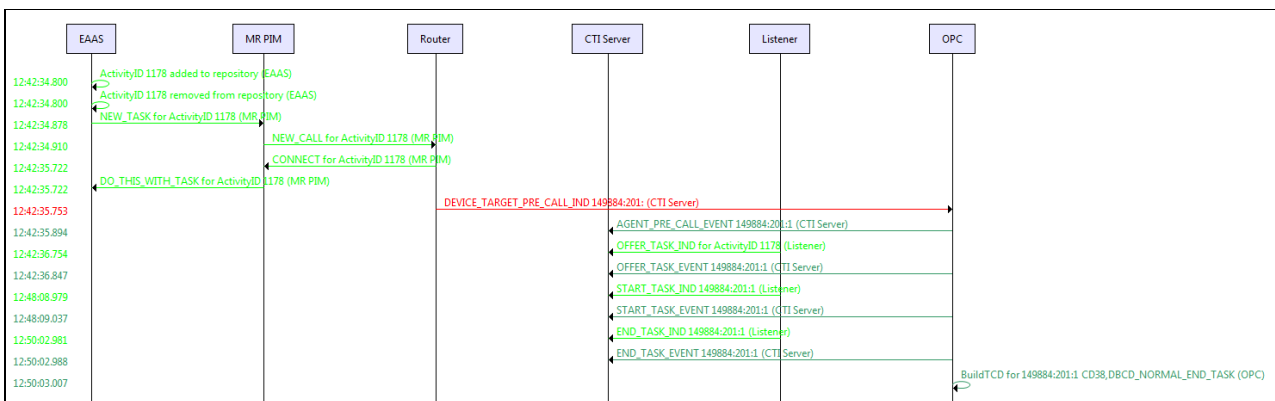

Resolution

- Integrated email routing is handled through the EAAS-MRPIM connection.
- EAAS sends a NEW_TASK to MR_PIM which is processed through a UCCE routing script.
- MR PIM returns a DO_THIS_WITH_TASK message to EAAS with routing instructions.
- Listener-CTI Server connection updates task status and agent availability