

## Contents

- [1 Introduction](#)
- [2 Design](#)
- [3 Version Information](#)
- [4 Related show Commands](#)
- [5 Show running-config](#)
- [6 Related Information](#)

## Introduction


IPv6 packets have the ability to use extension headers, these will be placed between the IPv6 portion and the next header (ex. ICMP). The following example is blocking the extension header 43 (dest-op), notice that there is three commands in the access-list *block4* (the only one being used in this configuration) You can tell it is the only being used by looking at *g0/1* and seeing the command *ipv6 traffic-filter block4 in*

```
deny 60 any any
sequence 30 deny ipv6 any any dest-option
permit ipv6 any any
```

The first command actually does nothing at this time to block this type of header (look at version, may change), the 2nd command blocks the dest-option extension headers that I am sending with the Spirent TestCenter and the third command is allowing all other ipv6 traffic because just like IPv4 access-list there is an implicit deny after the final statement in an access-list.

## Design

The switch is just used so I can test other devices besides the 3845 by switching vlans around.

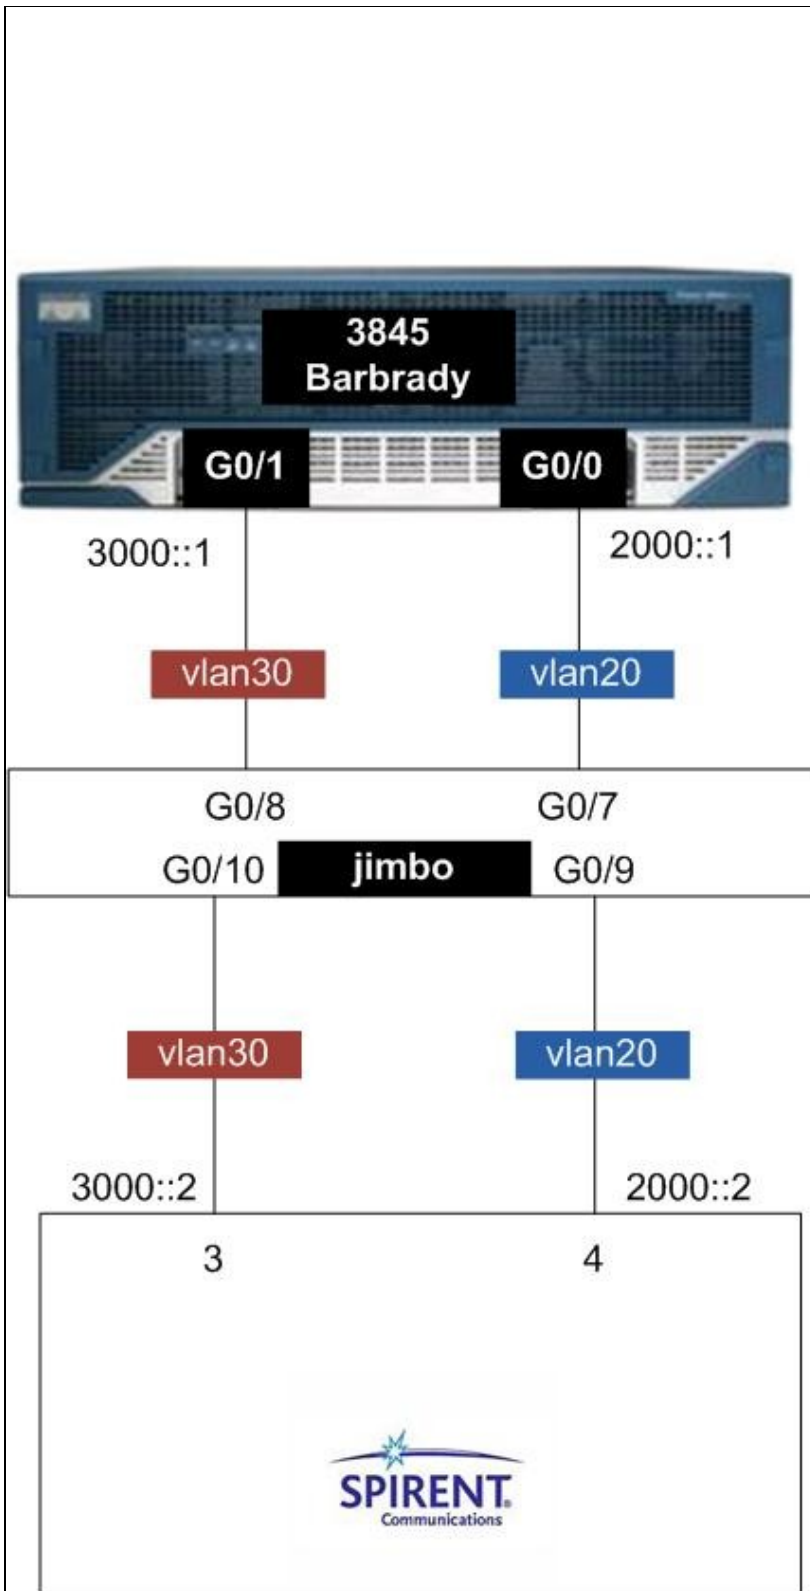

## Version Information

```
barbrady#sh ver
Cisco IOS Software, 3800 Software (C3845-ADVENTERPRISEK9-M), Version 15.1(2)T1, RELEASE SOFTWARE (
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2010 by Cisco Systems, Inc.
Compiled Wed 11-Aug-10 15:10 by prod_rel_team
```

## IOS-FW\_-\_Block\_IPv6\_Extension\_Headers

ROM: System Bootstrap, Version 12.4(13r)T11, RELEASE SOFTWARE (fc1)

barbrady uptime is 6 minutes  
System returned to ROM by power-on  
System image file is "flash:c3845-adventerprisek9-mz.151-2.T1.bin"  
Last reload type: Normal Reload

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:  
<http://www.cisco.com/wvl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to [export@cisco.com](mailto:export@cisco.com).

Cisco 3845 (revision 1.0) with 482304K/41984K bytes of memory.  
Processor board ID FTX1405AJSE  
2 Gigabit Ethernet interfaces  
1 terminal line  
2 Virtual Private Network (VPN) Modules  
1 cisco ips sensor(s), ips monitoring on slot 1  
DRAM configuration is 64 bits wide with parity enabled.  
479K bytes of NVRAM.  
500472K bytes of ATA System CompactFlash (Read/Write)

License Info:

License UDI:

```
-----  
Device#   PID                SN  
-----  
*0        CISCO3845-MB       FOC14023AUF
```

Configuration register is 0x2102

## Related show Commands

```
show ipv6 int br  
sh ipv6 neighbors  
sh ipv6 access-list
```

Certain show commands are supported by the [Output Interpreter Tool \(registered customers only\)](#), which allows you to view an analysis of show command output.

**Show running-config**

```
barbrady#sh run
Building configuration...

Current configuration : 1694 bytes
!
! Last configuration change at 17:43:30 UTC Thu Aug 12 2010
!
version 15.0
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname barbrady
!
boot-start-marker
boot-end-marker
!
!
no aaa new-model
!
!
!
!
!
dot11 syslog
ip source-route
!
!
ip cef
!
!
ipv6 unicast-routing
ipv6 cef
!
multilink bundle-name authenticated
!
!
!
!
voice-card 0
!
!
!
!
!
!
!
license udi pid CISCO3845-MB sn FOC14023AUF
!
redundancy
!
!
!
!
!
!
```

## IOS-FW\_-\_Block\_IPv6\_Extension\_Headers

```
!  
!  
interface GigabitEthernet0/0  
  no ip address  
  duplex auto  
  speed auto  
  media-type rj45  
  ipv6 address 2000::1/64  
!  
!  
interface GigabitEthernet0/1  
  no ip address  
  duplex full  
  speed 1000  
  media-type rj45  
  ipv6 address 3000::1/64  
  ipv6 enable  
  ipv6 traffic-filter block4 in  
!  
!  
interface IDS-Sensor0/1  
  no ip address  
  shutdown  
  service-module fail-open  
!  
  hold-queue 60 out  
!  
ip forward-protocol nd  
!  
!  
ip http server  
no ip http secure-server  
ip route 0.0.0.0 0.0.0.0 172.18.153.1  
!  
!  
!  
!  
!  
!  
ipv6 access-list block  
  deny 0 any any log  
  sequence 60 permit ipv6 any any  
!  
ipv6 access-list block2  
  deny 43 any any  
  sequence 30 deny 43 any any mobility  
  sequence 50 deny ipv6 any any routing-type 2  
  permit ipv6 any any  
!  
ipv6 access-list block3  
  sequence 60 deny 59 any any  
  permit ipv6 any any  
!  
ipv6 access-list block4  
  deny 60 any any  
  sequence 30 deny ipv6 any any dest-option  
  permit ipv6 any any  
!  
control-plane  
!  
!  
!  
!
```

Show running-config

## IOS-FW\_-\_Block\_IPv6\_Extension-Headers

```
!  
!  
!  
!  
!  
line con 0  
line aux 0  
line 386  
  no activation-character  
  no exec  
  transport preferred none  
  transport input all  
  transport output pad telnet rlogin lapb-ta mop udptn v120 ssh  
  stopbits 1  
  speed 115200  
line vty 0 4  
  login  
!  
scheduler allocate 20000 1000  
end  
  
barbrady#
```

### **Related Information**

[IOS-FW - Configuration Examples - Cisco Systems](#)